



the eggcheff

The Eggcheff® Scrambled



Project _____

Item No. _____

Quantity _____

EXTERIOR CONSTRUCTION

- Corrosion-resistant coated steel (NSF approved)
- ABS plastic housing with UL94 V0 certification
- Dark grey coated aluminum handle
- Cool-to-touch exterior; all surfaces below 50 °C
- 7 inch capacitive touch screen with tempered glass cover

INTERIOR CONSTRUCTION

- Dark grey coated aluminum (NSF approved)
- Fully welded and coated cook chamber
- Illuminated oven interior
- Removable cup holder and drip tray

STANDARD FEATURES

- Consumer operated system
- Cooking presets & custom settings for various recipes
- Simple and intuitive touch controls in multiple languages (7 standard languages included*)
- Automatic fork insertion system
- Fork stirring and cup rotation system
- Sensor controlled cooking process
- Fill level detection system
- Lockable fork reservoir for up to 50 forks
- Automatically locking and self-opening lid
- Display animation played during cooking
- Self diagnostics and error notifications for monitoring oven components and performance
- Includes plug and cord (1.2 meter / 3.9 ft. nominal)
- Firmware updates via USB
- Warranty – 1 year

*Languages: ENG, DE, FR, ESP, NL, IT, TR

PERFORMANCE

Fresh, chef quality, scrambled eggs, prepared in a cup and made in a minute. The Eggcheff® Scrambled enables anyone to prepare a fresh breakfast, is made for ventless operation and is the most energy efficient way to cook eggs.

- Cooks up to 150 grams of egg per portion
- Cooking time: ~ 60 seconds
- Cooks fresh ingredients
- Used with a reusable plastic cup ml or single-use paper cup 12 Oz/350 ml
- Used with reusable plastic fork or single-use wooden fork

COLORS

- White & Wood (HPL foil) – Luxury model
- White & Grey – Standard model

HYGIENIC / CLEANING

Most hygienic way of cooking eggs, since nothing touches the egg during cooking. The egg is cooked in the cup and the fork is taken out together with the cup, after cooking. Dishwasher safe oven inserts.

ACCESSORIES


- Drip tray (included)
- Cup holder (included)
- Fork reservoir key (included)
- Reusable plastic cup and fork
- Single-use paper cup and wooden fork

CERTIFICATIONS

This machine is tested according to IECCE CB SCHEME by Eurofins Product Service GmbH and Eurofins Electric Product Testing AG according to CAN/CSA C22.2 N. 60335-1 and CAN/CSA E60335-2-25. Testing according to IEC 60335-2-25:2020 for use in conjunction with IEC 60335-1:2010, COR1:2010, AMD1:2013, COR1:2014, AMD2:2016, COR1:2016 and is in compliance with National Differences for all countries under CENELEC, Japan, Australia, New-Zealand, United States of America and Canada. This product is tested and approved by NSF.



The Eggcheff® Scrambled

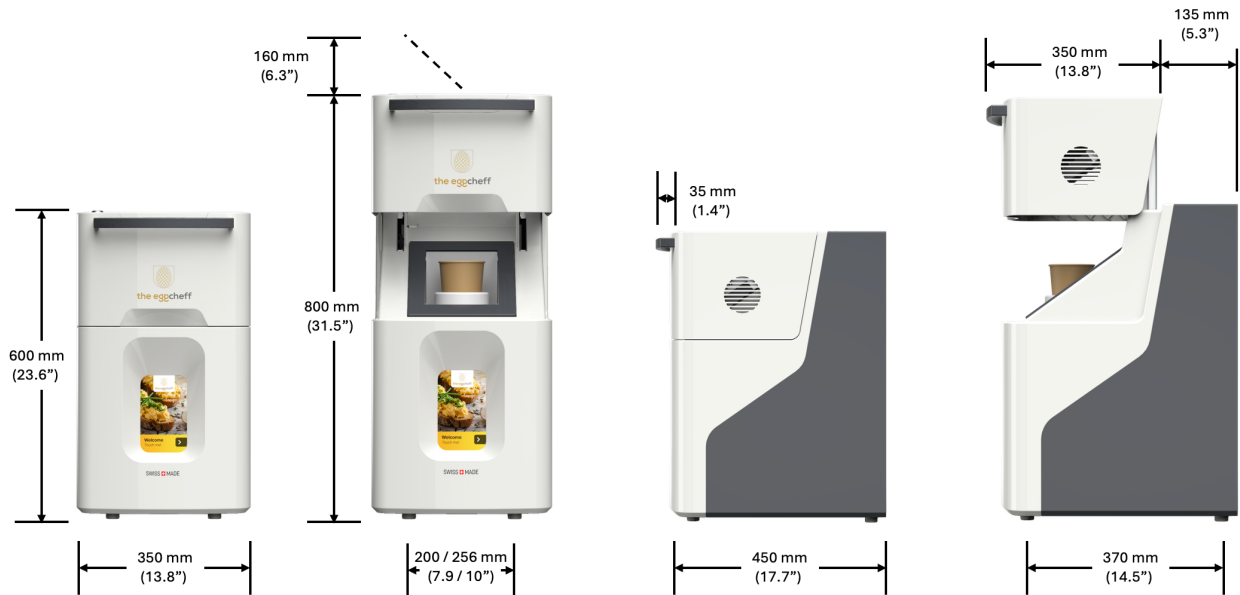

DIMENSIONS		
SINGLE UNIT		
Height (Lid closed)	600 mm	25.2"
Height (Lid open)	800 mm	31.5"
Width	350 mm	18.8"
Depth	450 mm	17.7"
Weight	26 kg	57 lb.
WALL CLEARANCE		
Top (Lid open)	200 mm	7.8"
Side	200 mm	7.8"
Back	50 mm	2"
SHIPPING INFORMATION		
All devices are packed in a double-wall corrugated box with a foam base inside the carton. Two PET straps hold the package together. For international shipments (outside EU) a wooden skid is recommended (Dimensions and weight excluding wooden skid).		
Box size: 600 x 400 x 640 mm (23.6" x 15.7" x 25.2")		
Item class: 8516.7970.90		
Approximate boxed weight: 29.3 kg (64.3 lb.)		
Eggciting Products BV Raphaelstraat 6, 7031 BA, Wehl The Netherlands, info@theeggcheff.com www.theeggcheff.com		

ELECTRICAL SPECIFICATIONS		
POWER CONSUMPTION		
Standby mode (on)		12 Watt (0.012 kW)
Cooking mode		1.640 Watt (1.64 kW)
SINGLE PHASE		
Europe 95-90-010-001 95-90-011-001	Type F (schuko)	230 VAC, 50 Hz, 1640W, Output 960W/2450 MHz
UK 95-90-010-002 95-90-011-002	Type G	230 VAC, 50 Hz, 1640W, Output 960W/2450 MHz
Denmark 95-90-010-004 95-90-011-004	Type K	230 VAC, 50 Hz, 1640W, Output 960W/2450 MHz
Switzerland 95-90-010-000 95-90-011-000	Type J	230 VAC, 50 Hz, 1640W, Output 960W/2450 MHz
US/Canada 95-90-010-003 95-90-011-003	Type B (NEMA 5)	120 VAC, 60 Hz, 1640W, Output 960W/2450 MHz
Japan 95-90-010-005 95-90-011-005	Type B	100 VAC, 50/60 Hz, 1640W, Output 960W/2450 MHz
Australia / New Zealand 95-90-010-006 95-90-011-006	Type I	230 VAC, 50 Hz, 1640W, Output 960W/2450 MHz

Note 1 : 95-90-010 is the standard (grey) design.

Note 2: 95-90-011 is the luxury (wood) design.

Note 3: The length of the powercord is 1.2 meter (3.9 feet)